


Rockfon® Sonar Activity™

Datasheet



Rockfon® Sonar Activity™



- Excellent sound absorption performance - class A1
- Recommended for classrooms and open plan offices where speech intelligibility is crucial and noise and activity levels are very high
- Possibility of maximizing ceiling height
- Available in different edges allows to create the different ceilings layout

Product Description

- Stone wool panel
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Education
- Industry
- Retail
- Industry
- Office
- Leisure

Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System
 A24	600 x 600 x 40	6,4	Chicago Metallic™ T24 3810
	1200 x 600 x 40	6,4	Chicago Metallic™ T24 3810
 B	600 x 600 x 40	6,4	Rockfon® System B Adhesive™
	1200 x 600 x 40	6,4	Chicago Metallic™ T24 3810


Other dimensions are available on request. Please contact Rockfon.



Performance



Sound absorption
 α_w : 0.95 (Class A)

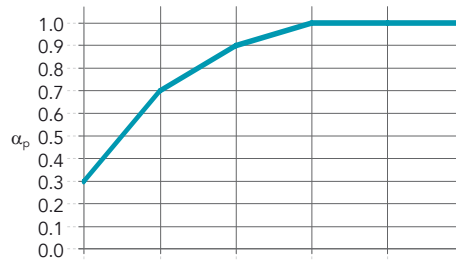

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
40 / 40	0.30	0.70	0.90	1.00	1.00	1.00	0.95	A	0.90



Reaction to fire
 A1



Light reflection
 85 %



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning

- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide



Hygiene
 Stone wool provides no sustenance to microorganisms



Clean Room
 ISO Class 5



Environment
 Recyclable



Indoor environment
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark
of the ROCKWOOL Group.

07:2020 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Rockfon Singapore

ROCKWOOL Building Materials (Singapore)
Pte Ltd.
No. 8, Tuas Avenue 2
Jurong Town
Singapore 639448
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533

Rockfon Malaysia

Chicago Metallic (Malaysia) Sdn Bhd
PTD 220527,
Jalan Indah Gemilang,
Taman Perindustrian Cemerlang,
81800 Ulu Tiram,
Johor, Malaysia
Tel: (+607) 863 3539
Fax: (+607) 863 1525

Rockfon Hong Kong

Rockwool Building Materials (Hong Kong) Ltd.
Unit 301-2, 3/F, Koon Wah Building,
No.2 Yuen Shun Circuit,
Yuen Chau Kok, Shatin,
N.T., Hong Kong
Tel: (+852) 2576-6117
Mobile: (+852) 9161-7924

